



Bleche Sheets

Bleche	Sheets	34
Trittleche (Warzenbleche)	Tread plates	35
Diamondbleche	Diamond sheets	35
Lochbleche Quadratlochung	Perforated sheets square	35
Lochbleche Rundlochung	Perforated sheets round	36
Bleche beschichtet RAL 9010 60 µm	Sheets powder coated RAL 9010 60 µm	36
Bleche eloxiert E6/C0 10–15 µm	Sheets anodized E6/C0 10–15 µm	36

Bleche Reinaluminium Sheets pure aluminium EN AW-1050A H24 (Al99,5)

S x B x L	kg/Tfl kg/Sheet
1 x 1000 x 2000 mm	5,400
1,5 x 1000 x 2000 mm	8,100
2 x 1000 x 2000 mm	10,800
3 x 1000 x 2000 mm	16,200
4 x 1000 x 2000 mm	21,600
5 x 1000 x 2000 mm (H14)	27,000
6 x 1000 x 2000 mm (H14)	32,400
10 x 1020 x 2020 mm (H111)	55,630
1 x 1250 x 2500 mm	8,438
1,2 x 1250 x 2500 mm	10,125
1,5 x 1250 x 2500 mm	12,500
2 x 1250 x 2500 mm	16,875
3 x 1250 x 2500 mm	25,400
EN AW-1050A H24 (Al99,5)	


S x B x L	kg/Tfl kg/Sheet
4 x 1250 x 2500 mm	33,333
5 x 1250 x 2500 mm	42,188
6 x 1250 x 2500 mm (H14)	50,625
1 x 1500 x 3000 mm (H14)	12,200
1,5 x 1500 x 3000 mm	18,225
2 x 1500 x 3000 mm	24,300
3 x 1500 x 3000 mm	36,450
4 x 1500 x 3000 mm	48,600
5 x 1500 x 3000 mm	60,750
1,5 x 1500 x 4000 mm	25,000
2 x 2000 x 4000 mm	43,200
3 x 2000 x 4000 mm	64,800
EN AW-1050A H24 (Al99,5)	



Bleche Sheets EN AW-5754 H22 (AlMg3)

S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	10,640
3 x 1000 x 2000 mm	15,960
4 x 1000 x 2000 mm	21,280
5 x 1000 x 2000 mm	26,600
6 x 1000 x 2000 mm	31,920
8 x 1000 x 2000 mm (H111)	42,560
10 x 1000 x 2000 mm (H111)	53,200
12 x 1020 x 2020 mm (H111)	63,840
15 x 1020 x 2020 mm (H111)	79,800
20 x 1020 x 2020 mm (H111)	106,400
2 x 1250 x 2500 mm	16,625
3 x 1250 x 2500 mm	24,938
EN AW-5754 H22 (AlMg3)	

S x B x L	kg/Tfl kg/Sheet
4 x 1250 x 2500 mm	33,250
5 x 1250 x 2500 mm	41,563
6 x 1250 x 2500 mm	49,875
8 x 1250 x 2500 mm (H111)	66,500
1 x 1500 x 3000 mm	11,970
2 x 1500 x 3000 mm	23,940
3 x 1500 x 3000 mm	35,910
4 x 1500 x 3000 mm	47,880
5 x 1500 x 3000 mm	59,850
6 x 1500 x 3000 mm	71,820
8 x 1500 x 3000 mm (H111)	95,760
EN AW-5754 H22 (AlMg3)	

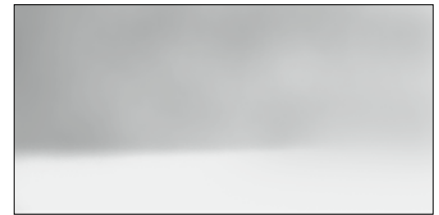

EN AW-6082 T6 (AlSi1MgMn)


S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	11,001
3 x 1000 x 2000 mm	16,207
EN AW-6082 T6 (AlSi1MgMn)	

Trittleche (Warzenbleche)

Tread plates

EN AW-5754 H114 (AlMg3)

S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	12,500
3 x 1000 x 2000 mm	18,000
4 x 1000 x 2000 mm	23,400
5 x 1000 x 2000 mm	28,800
8 x 1000 x 2000 mm	45,000
2 x 1250 x 2500 mm	19,700
3 x 1250 x 2500 mm	28,000
4 x 1250 x 2500 mm	36,500
5 x 1250 x 2500 mm	45,000
8 x 1250 x 2500 mm	69,000
2 x 1500 x 3000 mm	28,400
3 x 1500 x 3000 mm	40,500
4 x 1500 x 3000 mm	52,600
5 x 1500 x 3000 mm	64,000
EN AW-5754 H114 (AlMg3) Warzenhöhe: 1,5 mm • Warts height: 1,5 mm	

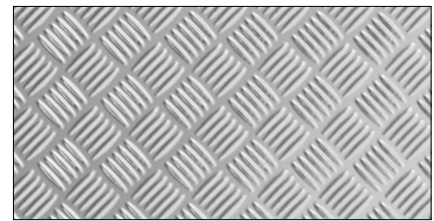


Diamondbleche

Diamond sheets

EN AW-3003 H22 (AlMn1Cu)

S x B x L	kg/Tfl kg/Sheet
1,5 x 1000 x 2000 mm	8,000
EN AW-3003 H22 (AlMn1Cu) Warzenhöhe: 0,5 mm • Warts height: 0,5 mm	

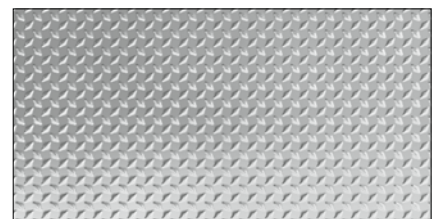


Lochbleche Quadratlochung

Perforated sheets square

EN AW-1050A (Al99,5)

S x B x L	kg/Tfl kg/Sheet	Lochung Perforation	Teilung Division
2 x 1000 x 2000 mm	6,600	5 x 5 mm	8 mm
2 x 1000 x 2000 mm	6,024	10 x 10 mm	15 mm
2 x 1000 x 2000 mm	9,708	10 x 10 mm	30 mm
2 x 1000 x 2000 mm	9,009	20 x 20 mm	50 mm
2 x 1000 x 2000 mm	9,433	25 x 25 mm	70 mm
2 x 1250 x 2500 mm	10,400	5 x 5 mm	8 mm
2 x 1250 x 2500 mm	9,480	10 x 10 mm	15 mm
2 x 1250 x 2500 mm	14,084	20 x 20 mm	50 mm
2 x 1250 x 2500 mm	14,925	25 x 25 mm	70 mm
2 x 1500 x 3000 mm	13,888	10 x 10 mm	15 mm
2 x 1500 x 3000 mm	20,408	20 x 20 mm	50 mm
EN AW-1050A (Al99,5) Quadratische Lochung, gerade • Square holes, square pitch			

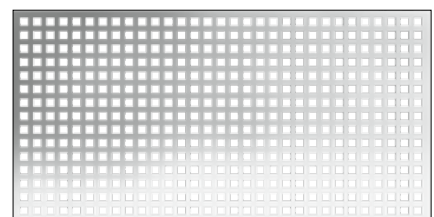

Teilung = Abstand von Lochmitte zu Lochmitte
Division = distance from hole center to hole center

Lochbleche Rundlochung


Perforated sheets round

EN AW-1050A (Al99,5)

S x B x L	kg/Tfl kg/Sheet	Lochung Perforation	Teilung Division
1 x 1000 x 2000 mm	3,280	8 mm	12 mm
2 x 1000 x 2000 mm	7,042	5 mm	8 mm
2 x 1000 x 2000 mm	6,410	8 mm	12 mm
2 x 1000 x 2000 mm	6,578	10 mm	15 mm
2 x 1000 x 2000 mm	5,988	15 mm	21 mm
2 x 1250 x 2500 mm	10,309	10 mm	15 mm
2 x 1500 x 3000 mm	14,705	10 mm	15 mm
EN AW-1050A (Al99,5) Rundlochung, versetzt • Round holes, staggered pitch			

Teilung = Abstand von Lochmitte zu Lochmitte

Division = distance from hole center to hole center

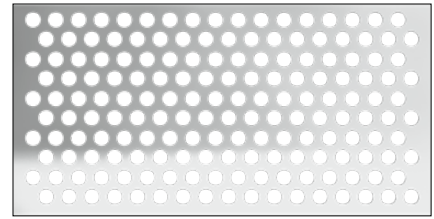

Bleche beschichtet RAL 9010 60 µm


Sheets powder coated RAL 9010 60 µm

EN AW-3105 H44 (AlMn0,5Mg0,5)

S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	10,800
1,2 x 1250 x 2500 mm	10,125
2 x 1250 x 2500 mm	16,667
1,2 x 1500 x 3000 mm (H42)	14,580
2 x 1500 x 3000 mm	25,000
EN AW-3105 H44 (AlMn0,5Mg0,5) einseitig foliert • single side foiled	

Gut kantbar, quer zur Walzrichtung.

Easy to bend, transvers to the rolling direction.

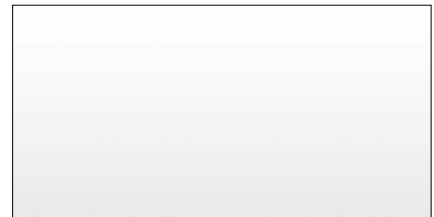

Bleche eloxiert E6/C0 10–15 µm

Sheets anodized E6/C0 10–15 µm

EN AW-5005 H14 (AlMg1)

S x B x L	kg/Tfl kg/Sheet
2 x 1000 x 2000 mm	10,800
2 x 1250 x 2500 mm	16,875
2 x 1500 x 3000 mm	24,300
EN AW-5005 H14 (AlMg1) einseitig foliert • single side foiled	

